

ORBIT Single Acting Hollow Center

ALUMINUM



CYLINDERS


- Lightweight aluminum alloy construction. Up to 60% lighter than comparable tonnage steel jacks!
- Heavy Duty Springs for Faster Retraction
- 3/8" high-flow quick disconnect couplers
- Constructed and tested in compliance with ANSI B30.1



Ordering Information

Operating pressure for all "ORBIT" cylinders up to 700 BAR / 10,000 PSI Single Acting Hollow Plunger design - 30 through 60 ton capacities

ORDER MODEL NUMBER	CYLINDER CAPACITY Tons	A STROKE in	E RE-TRACTED HEIGHT in	I CENTER HOLE in	EFFECTIVE AREA sq.in	OIL CAPACITY cu.in	B BASE TO INLET PORT in	D CYLINDER BODY in	WEIGHT lb.
ORSH 30/3	30	3	8.675	1.312	7.21	22.0	1.0	5.5	22
ORSH 30/6	30	6	11.675	1.312	7.21	44.0	1.0	5.5	30
ORSH 60/3	60	3	10.25	2.125	12.30	37.0	1.0	7.5	42
ORSH 60/6	60	6	13.25	2.125	12.30	74.0	1.0	7.5	55

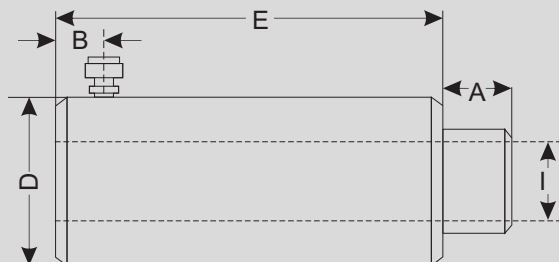

ORBIT Manufacturing Inc. is committed to continuous product enhancement and development and reserves the right to make product design changes without prior notice.

Warranty
All ORBIT cylinders are guaranteed against defects in materials and workmanship. Warranty does not cover normal wear and tear, overloading or improper use. For warranty claims, please contact your nearest ORBIT dealer.

ORBIT Manufacturing Inc.
#104 - 3070 Norland Ave.
Burnaby BC
Canada V5B 3A6

Phone: (604)-293-0063
Fax: (604)-293-0064
Email: orbit@telus.net
Web: www.orbithydraulics.com

"ORBIT" - The Lightweight with a **Solid Punch**

Made in Canada

